



SETTING UP YOUR BLEACH SPRAYER 190447

SMITH
PERFORMANCE SPRAYERS

1. Assemble Hose To Tank

IMPORTANT: Do not attempt to heat or alter hose, hose nut, or barb prior to assembly.

1. Align hose barb tabs, push hose barb into tank until it stops (**See Figure A**).
2. Slide hose nut into place and turn clockwise to tighten. (**See Figure B**).

NOTE: Do not use tools to tighten hose nut.




Figure A




Figure B

2. Assemble Wand & Nozzle

Place nozzle onto the end of the wand assembly and tighten securely. (**See Figure C**)



Figure C

Configuration for
nozzle tip sprayers

3. Assemble Shut-off to Wand

Screw on Wand Assembly to end of Shut-off and tighten securely. (**See Figure D**)


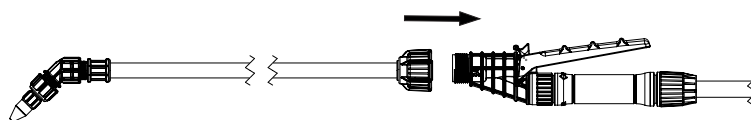


Figure D

PARTS INCLUDED WITH YOUR
BLEACH SPRAYER
190447



182491
SHUT-OFF ASSEMBLY



181884
21" POLY WAND ASSEMBLY

